

*Economy, convenience, versatility: the spray sprinkler that can be used with virtually any standard nozzle*



The SRS lets you take advantage of a spray that offers the unrivaled degree of Hunter quality no matter what nozzle you currently have in stock. Better yet, choose to install the adjustable arc nozzles Hunter has created exclusively for use in tandem with the SRS. Either way, you'll receive a superior spray. One whose construction, highlighted by a rugged flat body cap, is

both brawny and durable. And one whose performance delivers the most effective coverage possible, thanks to a no-flow-by wiper seal that allows your system to handle low water pressure as proficiently as high. And, best of all, what truly makes this spray head so hard to resist is that its price is so easy to handle.

## Features & Benefits



### Rugged body cap design

Stands up to heavy traffic in public areas

### Compatible with all standard nozzles

Accepts popular female-threaded nozzles including Hunter adjustable arc nozzles

### Heavy-duty UV-resistant wiper seal

Assures long life at a wide range of water pressures

### Standard side inlet

Featured on 6" and 12" (15 and 30 cm) models for installation convenience

### Ratcheting riser for quick arc alignment

Ensures quick pattern alignment

### Strong stainless steel spring

Ensures reliable retraction year after year

## Models

- SRS-00 – Shrub
- SRS-02 – 2" Pop-up (5 cm)
- SRS-03 – 3" Pop-up (7.5 cm)
- SRS-04 – 4" Pop-up (10 cm)
- SRS-06 – 6" Pop-up (15 cm)
- SRS-12 – 12" Pop-up (30 cm)

## Dimensions

- Overall height:
  - SRS-02 – 4" (10 cm)
  - SRS-03 – 4<sup>7</sup>/<sub>8</sub>" (12.5 cm)
  - SRS-04 – 6" (15 cm)
  - SRS-06 – 8<sup>1</sup>/<sub>2</sub>" (21.5 cm)
  - SRS-12 – 15<sup>1</sup>/<sub>4</sub>" (39 cm)
- ½" female inlet NPT
- Exposed diameter: 2" (5 cm)

## Operating Specifications

- Recommended pressure range: 15 to 70 PSI (1.0 to 4.8 bars; 103 to 482 kPa)
- Flow-by: 0 at 10 PSI (.7 bars; 68 kPa) or greater; .1 GPM (0.02 m<sup>3</sup>/hr; 0.4 l/min) otherwise
- Precipitation rates: approximately 1.5" per hour

## SPECIFICATION GUIDE

EXAMPLE: **SRS - 04 - 10H**

MODEL	POP-UP HEIGHT	NOZZLE SERIES	PATTERN
SRS	00 = Shrub 02 = 2" Pop-up 04 = 4" Pop-up 06 = 6" Pop-up 12 = 12" Pop-up	8 = 8 Series 10 = 10 Series 12 = 12 Series 15 = 15 Series 17 = 17 Series	A = Adjustable Q = Quarter-Circle H = Half-Circle F = Full-Circle


**Note:** Bodies and nozzles sold separately. Also compatible with Hunter's bubbler and specialty nozzles.

### Adjustable Arc Nozzles Performance Data

Arc	Pressure PSI	8 Foot Radius Adjustable from 25° to 360° Trajectory: 0° Color Code: Brown ●			10 Foot Radius Adjustable from 25° to 360° Trajectory: 15° Color Code: Red ●			12 Foot Radius Adjustable from 25° to 360° Trajectory: 28° Color Code: Green ●			15 Foot Radius Adjustable from 25° to 360° Trajectory: 28° Color Code: Black ●			17 Foot Radius Adjustable from 25° to 360° Trajectory: 28° Color Code: Gray ●							
		Nozzle	Radius ft.	Flow GPM	Precip in/hr	Nozzle	Radius ft.	Flow GPM	Precip in/hr	Nozzle	Radius ft.	Flow GPM	Precip in/hr	Nozzle	Radius ft.	Flow GPM	Precip in/hr				
45°	20	7'	0.17	2.67	3.08	9'	0.17	1.62	1.87	11'	0.25	1.59	1.84	14'	0.39	1.51	1.75	16'	0.49	1.46	1.68
	25	8'	0.20	2.35	2.71	10'	0.20	1.50	1.73	12'	0.28	1.47	1.70	15'	0.43	1.47	1.70	17'	0.57	1.51	1.74
	30	8'	<b>0.25</b>	<b>2.95</b>	<b>3.40</b>	10'	<b>0.25</b>	<b>1.89</b>	<b>2.18</b>	12'	<b>0.32</b>	<b>1.68</b>	<b>1.95</b>	15'	<b>0.47</b>	<b>1.59</b>	<b>1.84</b>	17'	<b>0.60</b>	<b>1.60</b>	<b>1.85</b>
	35	9'	0.26	2.42	2.80	11'	0.26	1.62	1.87	13'	0.37	1.66	1.92	16'	0.52	1.55	1.79	18'	0.63	1.49	1.72
90°	20	7'	0.34	2.67	3.08	9'	0.34	1.62	1.87	11'	0.50	1.59	1.84	14'	0.77	1.51	1.75	16'	0.97	1.46	1.68
	25	8'	0.39	2.35	2.71	10'	0.39	1.50	1.73	12'	0.55	1.47	1.70	15'	0.86	1.47	1.70	17'	1.13	1.51	1.74
	30	8'	<b>0.49</b>	<b>2.95</b>	<b>3.40</b>	10'	<b>0.49</b>	<b>1.89</b>	<b>2.18</b>	12'	<b>0.63</b>	<b>1.68</b>	<b>1.95</b>	15'	<b>0.93</b>	<b>1.59</b>	<b>1.84</b>	17'	<b>1.20</b>	<b>1.60</b>	<b>1.85</b>
	35	9'	0.51	2.42	2.80	11'	0.51	1.62	1.87	13'	0.73	1.66	1.92	16'	1.03	1.55	1.79	18'	1.25	1.49	1.72
120°	20	7'	0.45	2.67	3.08	9'	0.45	1.62	1.87	11'	0.67	1.59	1.84	14'	1.03	1.51	1.75	16'	1.29	1.46	1.68
	25	8'	0.52	2.35	2.71	10'	0.52	1.50	1.73	12'	0.73	1.47	1.70	15'	1.15	1.47	1.70	17'	1.51	1.51	1.74
	30	8'	<b>0.65</b>	<b>2.95</b>	<b>3.40</b>	10'	<b>0.65</b>	<b>1.89</b>	<b>2.18</b>	12'	<b>0.84</b>	<b>1.68</b>	<b>1.95</b>	15'	<b>1.24</b>	<b>1.59</b>	<b>1.84</b>	17'	<b>1.60</b>	<b>1.60</b>	<b>1.85</b>
	35	9'	0.68	2.42	2.80	11'	0.68	1.62	1.87	13'	0.97	1.66	1.92	16'	1.37	1.55	1.79	18'	1.67	1.49	1.72
180°	20	7'	0.68	2.67	3.08	9'	0.68	1.62	1.87	11'	1.00	1.59	1.84	14'	1.54	1.51	1.75	16'	1.94	1.46	1.68
	25	8'	0.78	2.35	2.71	10'	0.78	1.50	1.73	12'	1.10	1.47	1.70	15'	1.72	1.47	1.70	17'	2.26	1.51	1.74
	30	8'	<b>0.98</b>	<b>2.95</b>	<b>3.40</b>	10'	<b>0.98</b>	<b>1.89</b>	<b>2.18</b>	12'	<b>1.26</b>	<b>1.68</b>	<b>1.95</b>	15'	<b>1.86</b>	<b>1.59</b>	<b>1.84</b>	17'	<b>2.40</b>	<b>1.60</b>	<b>1.85</b>
	35	9'	1.02	2.42	2.80	11'	1.02	1.62	1.87	13'	1.46	1.66	1.92	16'	2.06	1.55	1.79	18'	2.50	1.49	1.72
240°	20	7'	0.91	2.67	3.08	9'	0.91	1.62	1.87	11'	1.33	1.59	1.84	14'	2.05	1.51	1.75	16'	2.59	1.46	1.68
	25	8'	1.04	2.35	2.71	10'	1.04	1.50	1.73	12'	1.47	1.47	1.70	15'	2.29	1.47	1.70	17'	3.01	1.51	1.74
	30	8'	<b>1.31</b>	<b>2.95</b>	<b>3.40</b>	10'	<b>1.31</b>	<b>1.89</b>	<b>2.18</b>	12'	<b>1.68</b>	<b>1.68</b>	<b>1.95</b>	15'	<b>2.48</b>	<b>1.59</b>	<b>1.84</b>	17'	<b>3.20</b>	<b>1.60</b>	<b>1.85</b>
	35	9'	1.36	2.42	2.80	11'	1.36	1.62	1.87	13'	1.95	1.66	1.92	16'	2.75	1.55	1.79	18'	3.33	1.49	1.72
270°	20	7'	1.02	2.67	3.08	9'	1.02	1.62	1.87	11'	1.50	1.59	1.84	14'	2.31	1.51	1.75	16'	2.91	1.46	1.68
	25	8'	1.17	2.35	2.71	10'	1.17	1.50	1.73	12'	1.65	1.47	1.70	15'	2.58	1.47	1.70	17'	3.39	1.51	1.74
	30	8'	<b>1.47</b>	<b>2.95</b>	<b>3.40</b>	10'	<b>1.47</b>	<b>1.89</b>	<b>2.18</b>	12'	<b>1.89</b>	<b>1.68</b>	<b>1.95</b>	15'	<b>2.79</b>	<b>1.59</b>	<b>1.84</b>	17'	<b>3.60</b>	<b>1.60</b>	<b>1.85</b>
	35	9'	1.53	2.42	2.80	11'	1.53	1.62	1.87	13'	2.19	1.66	1.92	16'	3.09	1.55	1.79	18'	3.75	1.49	1.72
360°	20	7'	1.36	2.67	3.08	9'	1.36	1.62	1.87	11'	2.00	1.59	1.84	14'	3.08	1.51	1.75	16'	3.88	1.46	1.68
	25	8'	1.56	2.35	2.71	10'	1.56	1.50	1.73	12'	2.20	1.47	1.70	15'	3.44	1.47	1.70	17'	4.52	1.51	1.74
	30	8'	<b>1.96</b>	<b>2.95</b>	<b>3.40</b>	10'	<b>1.96</b>	<b>1.89</b>	<b>2.18</b>	12'	<b>2.52</b>	<b>1.68</b>	<b>1.95</b>	15'	<b>3.72</b>	<b>1.59</b>	<b>1.84</b>	17'	<b>4.80</b>	<b>1.60</b>	<b>1.85</b>
	35	9'	2.04	2.42	2.80	11'	2.04	1.62	1.87	13'	2.92	1.66	1.92	16'	4.12	1.55	1.79	18'	5.00	1.49	1.72
40	10'	2.92	2.81	3.25	12'	2.92	1.95	2.25	14'	3.36	1.65	1.91	17'	4.52	1.51	1.74	19'	5.52	1.47	1.70	

### Pro-Spray® Nozzles Performance Data

Arc	Pressure PSI	Pattern	8 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 0° Color Code: Brown ●			10 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 15° Color Code: Red ●			12 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 28° Color Code: Green ●			15 Foot Radius Fixed (Quarter, Half, Full) Trajectory: 28° Color Code: Black ●			17 Foot Radius Fixed (Quarter) Trajectory: 28° Color Code: Gray ●							
			Nozzle	Radius ft.	Flow GPM	Precip in/hr	Nozzle	Radius ft.	Flow GPM	Precip in/hr	Nozzle	Radius ft.	Flow GPM	Precip in/hr	Nozzle	Radius ft.	Flow GPM	Precip in/hr				
90°	20	Q	7'	0.17	1.34	1.54	9'	0.30	1.43	1.65	11'	0.50	1.59	1.84	14'	0.77	1.51	1.75	16'	0.97	1.46	1.68
	25		8'	0.19	1.14	1.32	10'	0.33	1.27	1.47	12'	0.55	1.47	1.70	15'	0.86	1.47	1.70	17'	1.13	1.51	1.74
	30		8'	<b>0.24</b>	<b>1.44</b>	<b>1.67</b>	10'	<b>0.39</b>	<b>1.50</b>	<b>1.73</b>	12'	<b>0.63</b>	<b>1.68</b>	<b>1.95</b>	15'	<b>0.93</b>	<b>1.59</b>	<b>1.84</b>	17'	<b>1.20</b>	<b>1.60</b>	<b>1.85</b>
	35		9'	0.33	1.57	1.81	11'	0.49	1.56	1.80	13'	0.73	1.66	1.92	16'	1.03	1.55	1.79	18'	1.25	1.49	1.72
180°	20	H	7'	0.34	1.34	1.54	9'	0.60	1.43	1.65	11'	1.00	1.59	1.84	14'	1.54	1.51	1.75	16'	1.94	1.46	1.68
	25		8'	0.38	1.14	1.32	10'	0.66	1.27	1.47	12'	1.10	1.47	1.70	15'	1.72	1.47	1.70	17'	2.26	1.51	1.74
	30		8'	<b>0.48</b>	<b>1.44</b>	<b>1.67</b>	10'	<b>0.82</b>	<b>1.58</b>	<b>1.82</b>	12'	<b>1.31</b>	<b>1.75</b>	<b>2.02</b>	15'	<b>1.86</b>	<b>1.59</b>	<b>1.84</b>	17'	<b>2.40</b>	<b>1.60</b>	<b>1.85</b>
	35		9'	0.66	1.57	1.81	11'	0.98	1.56	1.80	13'	1.46	1.66	1.92	16'	2.06	1.55	1.79	18'	2.50	1.49	1.72
360°	20	F	7'	0.68	1.34	1.54	9'	1.20	1.43	1.65	11'	2.00	1.59	1.84	14'	3.08	1.51	1.75	16'	3.88	1.46	1.68
	25		8'	0.76	1.14	1.32	10'	1.32	1.27	1.47	12'	2.20	1.47	1.70	15'	3.44	1.47	1.70	17'	4.52	1.51	1.74
	30		8'	<b>0.95</b>	<b>1.43</b>	<b>1.65</b>	10'	<b>1.62</b>	<b>1.56</b>	<b>1.80</b>	12'	<b>2.65</b>	<b>1.77</b>	<b>2.05</b>	15'	<b>3.72</b>	<b>1.59</b>	<b>1.84</b>	17'	<b>4.80</b>	<b>1.60</b>	<b>1.85</b>
	35		9'	1.32	1.57	1.81	11'	1.96	1.56	1.80	13'	2.92	1.66	1.92	16'	4.12	1.55	1.79	18'	5.00	1.49	1.72
40	10'	1.92	1.85	2.13	12'	2.52	1.68	1.95	14'	3.36	1.65	1.91	17'	4.54	1.51	1.74	19'	5.52	1.47	1.70		

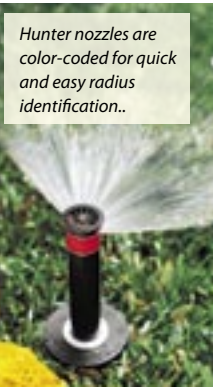

### Short Radius Nozzles Performance Data

Arc	Pressure PSI	Color Code: Light Brown ●	Color Code: Light Green ●			Color Code: Light Blue ●								
			Nozzle	Radius ft.	Flow GPM	Precip in/hr	Nozzle	Radius ft.	Flow GPM	Precip in/hr	Nozzle	Radius ft.	Flow GPM	Precip in/hr
90°	20	2Q	2'	0.09	8.66	10.00	4'	0.20	4.81	5.56	6'	0.47	5.03	5.80
	25		2'	0.10	9.63	11.11	4'	0.22	5.29	6.11	6'	0.49	5.24	6.05
	30		2'	<b>0.11</b>	<b>10.59</b>	<b>12.23</b>	4'	<b>0.22</b>	<b>5.29</b>	<b>6.11</b>	6'	<b>0.51</b>	<b>5.45</b>	<b>6.30</b>
	35		2'	0.12	11.55	13.34	4'	0.24	5.78	6.67	6'	0.52	5.56	6.42
180°	20	2H	2'	0.14	13.48	15.56	4'	0.24	5.78	6.67	6'	0.52	5.56	6.42
	25		2'	0.12	5.78	6.67	4'	0.41	4.93	5.70	6'	0.95	5.08	5.87
	30		2'	0.14	6.74	7.78	4'	0.43	5.17	5.97	6'	0.97	5.19	5.99
	35		2'	0.18	8.66	10.00	4'	0.46	5.53	6.39	6'	0.99	5.29	6.11
40	2'	0.18	8.66	10.00	4'	0.46	5.53	6.39	6'	1.00	5.35	6.17		

### PCN Nozzle & PCB Performance Data

Model	Pressure PSI	Flow GPM	Pattern Type
25	30	0.25	Trickle
50	30	0.50	Trickle
10	30	1.00	Umbrella
20	30	2.00	Umbrella

Note: Typical spacing 1 to 3 ft.

### Model S-8A Stream Spray Nozzle Performance Data

Arc	Pressure PSI	Radius ft.	Flow GPM	Precip in/hr	
				▲	▲